

KLCRANES.INC

59 CHEMIN DU BRULE LAC BEAUPORT G3B0P5, QUEBEC
TEL 1-418-623-2898 FAX 1-418-623-2898

REMOTE CONTROL F21-4D

4 Button double step system that comes with 1 receiver + 1 Transmitter
(with a control voltage of 24/48/110/220/380 VAC 12/24 VDC)



GENERAL SPECIFICATION

Typical application :

Hoist, winches, lifts, doors,

Operating Distance: 250feet

Frequency: 310 Mhz band

Frequency generation: Crystal
(plug in)

Security coding: 4.3 billion unique
ID code

Environmental rating: IP 65

Licensing: FCC certified, no
licences needed. FCC identifier
2384AF212S

Warranty : 2 years

Temperature rating:

-35 deg C a 75 deg C (-31 deg F a
167 deg F

RECEVEIR SPECIFICATION

Size: W 3.37"x D 7.10" xL 7.37"

Parts : F21-4D-RX

Power standards:

110/220 VAC

Power available:

24/48/110/220/380 VAC 12/24 VDC

Relay rating :

10 Amp/250 V AC

Weight : 3 Lbs

Includes: Pre-cabled

Accessories available:

Exterior anten

Horn

TRANSMITER SPECIFICATIONS

Parts : F21-4D-TX

Transmitters: 1 supplied standard

Size: W 2" x D .2" x L 6.2"

Weight: 9 ounces

Matériel: Shock resistant, fiber
reinforced nylon

Power source: 2 AA alkaline batteries

Battery power indication : LED

Buttons: 4 programmable, 2 double step
plus start and stop. Rated to 2 million
cycles

Start key: Setting buttons

Stop Button: Key magnetic

F21•4D

(BLACK) POWER 1

110VAC Standard

(BROWN) POWER 2

(ORANGE) COM

(RED) MAIN

(YELLOW) UP

(GREEN) DOWN


(GREY) U/D 2S

(BLUE) EAST

(PURPLE) WEST

(WHITE) E/W 2S

(PINK) RO

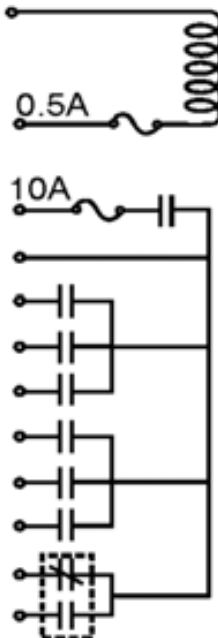

WHY BUYING TELECRANE?

Quality-price relationship
unattainable

Quick and efficient service,
contained prices of spare parts

Iso 9001 certified production

Ready delivery for the entire set of
products

Rapidity of installation, receiver
with wire cable

Test of every product provided with
its relative certificate

Contained weight and sizes,
friendly use