

KLCRANES.INC

59 CHEMIN DU BRULE LAC BEAUPORT G3B0P5, QUEBEC
TEL 1-418-623-2898 FAX 1-418-623-2898



REMOTE CONTROL F24-6D

6 Button double step system that comes with 1 receiver +2 Transmitter
(with a control voltage of 24/48/110/220/380 VAC 12/24 VDC)

GENERAL SPECIFICATION

Typical application :

Overhead cranes, dual hoist
Monorails, etc...

Operating Distance: 500+feet

Frequency: 310 Mhz band

Frequency generation: Crystal
(plug in)

Security coding: 4.3 billion unique
ID code

Environmental rating: IP 65

Licensing: FCC certified, no
licences needed.

FCC identifier LWN9312F24

Warranty : 2 years

Temperature rating:

-35 deg C a 75 deg C (-31 deg F a
167 deg F

RECEVEIR SPECIFICATION

Size: W 6.5" x D 4.5" x L 10.0"

Parts : F24-6D-RX

Power standards:

110/220 VAC

Power available:

24/48/110/220/380 VAC 12/24 VDC

Relay rating :

10 Amp/250 V AC

Weight : 7 Lbs

Includes: Pre-cabled

Accessories available:

External Antenna Kit

Horn

TRANSMITTER SPECIFICATIONS

Parts : F24-6D-TX

Transmitters: 1 supplied standard

Size: W 2.0" x D 2.0" x L 7.25"

Weight: 11 ounces

Matériel: Shock resistant, fiber
reinforced nylon

Power source: 2 AA alkaline batteries

Battery power indication : LED


Buttons: 6 programmable, 2 double step
plus start and stop.

Rated to 2 million cycles

Start key: Setting buttons

Stop Button: Key magnetic

F24•6D

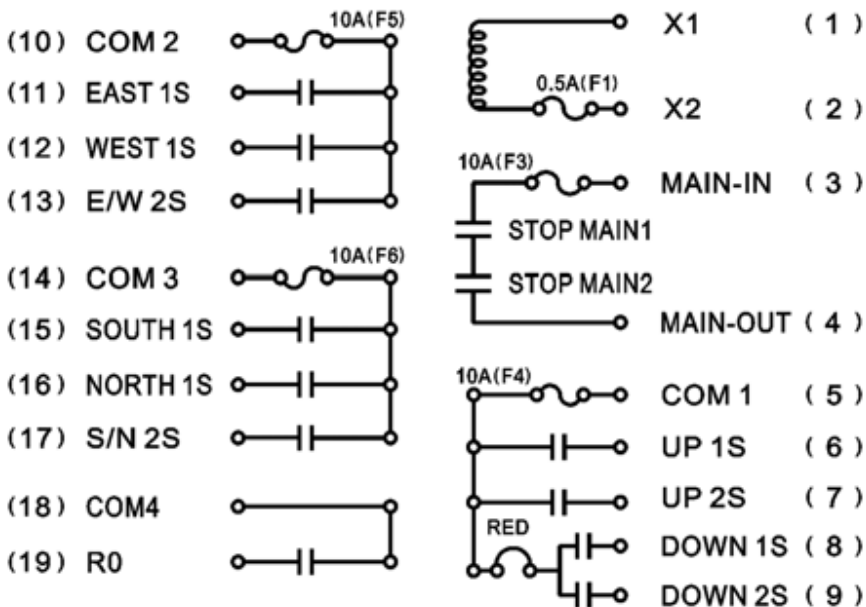

WHY BUYING TELECRANE?

Quality-price relationship
unattainable

Quick and efficient service,
contained prices of spare parts

Iso 9001 certified production

Ready delivery for the entire set of
products

Rapidity of installation, receiver
with wire cable

Test of every product provided with
its relative certificate

Contained weight and sizes,
friendly use